

PT-15000-ALPR4

KEY FEATURES

- **LICENSE PLATE RECOGNITION**
Embedded OCR ALPR capabilities. Includes Vehicle features and description recognition
- **4X OPTICAL ZOOM**
Zoom onto distant subjects while still maintaining clarity, delivering high quality video the entire zoom range
- **AI VIDEO ANALYTICS**
8 intelligent OCR modes powered by AI engine which filters objects to focus on human and vehicle detection
- **UP TO 90FPS**
Cameras catch images with no latency during high speed movement



LEARN MORE ABOUT THIS PRODUCT

Ultra Low Light

Maintains plate capture, accuracy, & details using IR's in 0LUX lighting environments.

Smart IR II

Self adjusting Infrared high beam and low beam functionality suitable for all lighting conditions. Up to 180 Meters.

HLC

High Light Compensation. Improving image visibility under strong light sources.

IP67-Rated Resistance

Camera is built to withstand all weather conditions.

Local Storage Backup

Up to 1 Terabyte local storage for video and plate backup.

Integrated Cable Mgmt.

POE, Power, and Alarm block interface built into the base of the camera for neat installation.

120dB Super WDR

The cameras built in Super WDR produces quality images across all ranges of light level.

IK10-Vandal Proof

Camera withstands the highest rated impact testing using international standards.

Vehicle Recognition

- License Plate
(Temporary and Obscured included)
- No Plate Vehicle Recognition
- Vehicle type
(Motorcycle, Car, SUV, Truck, etc)
- Plate & Vehicle Color
- Model
- Region
- Direction of Travel

CREATE A SMART CITY

POWERED BY PACKETALK

- ✓ **Customize a mobile surveillance trailer**



◀ Diesel-Powered Surveillance Trailer PT-RD6000

- ✓ **Add a LPR**
Our License Plate Recognition is an AI-based license plate detection, recognition and search solution with an accuracy as high as 98%.


- ✓ **Deploy iSMART**
The interactive Situational Monitoring Analysis Response Tool (iSMART) is a proven real-time situational awareness, problem solving, and resource management

QUESTIONS? CONTACT US AT

201 355 3323 OR sales@packetalk.net




PT-15000-ALPR4

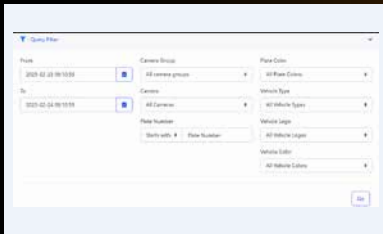

INAAP

Packetalk Interoperable National ALPR & Analysis Platform. Creates Interoperability across county and state lines for Plate recognition and vehicle exception reports. Equipped with API and third Party integration.

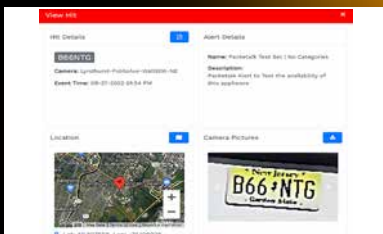

ALERT SYSTEM

The Alert system provides real time interactive Popup/Email notifications for users. Customizable Alert creation and fully integrated with NCIC/SCIC/MVC databases.



REAL TIME ACTIONABLE INTELLIGENCE

Built in GPS location for real time tracking or historical alerts plotted on an interactive map.

SPECIFICATIONS

CAMERA	
Image Sensor	1/1.8" Progressive Scan CMOS
Min. Illumination	Color: 0.005Lux@F1.6 B/W: 0Lux with IR on
WDR	120dB Super WDR
Shutter Time	1/100000s~1s
IR Distance	850nm
Illumination Distance	Up to 50m
S/N	>55dB
LENS	
Lens	8~32mm, 4X Optical Zoom
Field of View	H44°~H13°/D51°~D15°/V25°~V7°
Focus Control	Auto/Manual
P-Iris	Support
Iris Control	Auto
LPR	
Max. Vehicle Speed	125 MPH
Recognition Accuracy	98%
Coverage	4 Lanes
Attributes Identification	Plate Color, Vehicle Type, Vehicle Color, Vehicle Brand, No-Plate Vehicle Capture, Vehicle Direction Detection * Vehicle Color or Plate Color Identification are not supported in low-light or night conditions.
VIDEO	
Max. Image Resolution	2688x1520
INTERFACE	
Ethernet	1*RJ45 10M/100M Ethernet Port
Audio I/O	1/1
Alarm Input/Output	2/2 (1 relay output; 1 open collector output, max. 12V DC/10mA)
NETWORK	
Network Storage	NAS (Support NFS, SMB/CIFS), ANR
Protocol	IPv4/IPv6, ARP, TCP, UDP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL



For PDF of PT-15000-ALPR4



For more Packetalk Cameras

SYSTEM	
Smart Compatibility	API, MQTT, HTTP, TCP, ONVIF Profile G & M & S & T
Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 1TB
Advanced Function	BLC, HLC, 2D DNR, 3D DNR, Defog, AWB, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur, Watermark
Event Trigger	Black/White List, Attributes Event, Motion Detection, Network Disconnection, External Input, Audio Alarm, etc.
Event Action	FTP Upload, SMTP Upload, SD Card Record, External Output, SIP Phone, HTTP Notification, etc.
GENERAL	
Working Temp.	-40°C~60°C
Working Humidity	0~95% (Non-condensing)
Power Supply	PoE (802.3at) / DC 12V±10%
Power Consumption	Min : 3.9W (DC 12V), 4.9W(PoE) Max : 14.8W (DC 12V), 17.8W(PoE)
Weather Proof	Up to IP67-rated for Weather-resistant Performance
Housing	Vandal-proof IK10-rated Metal Housing
Surge Protection	4KV
Weight	2.87 lbs.
Dimensions	12.60 x 5.28 x 5.35 inches

GET IN TOUCH

CONTACT US

T (201) 355-3323
F (201) 603-6405
E sales@packetalk.net

PACKETALK.NET

© 2026, Packetalk. The Packetalk logo is a registered trademark of Packetalk. All other company names and products are trademarks or registered trademarks of their respective companies. All information provided is subject to change without notice.